




# RT665


rough terrain crane  
65 ton capacity

range diagram & lifting capacities




DIMENSIONS ARE FOR LARGEST FACTORY FURNISHED HOOK BLOCK AND HOOK & BALL, WITH ANTI-TWO BLOCK ACTIVATED

Range Diagram  
(36' - 111' boom)

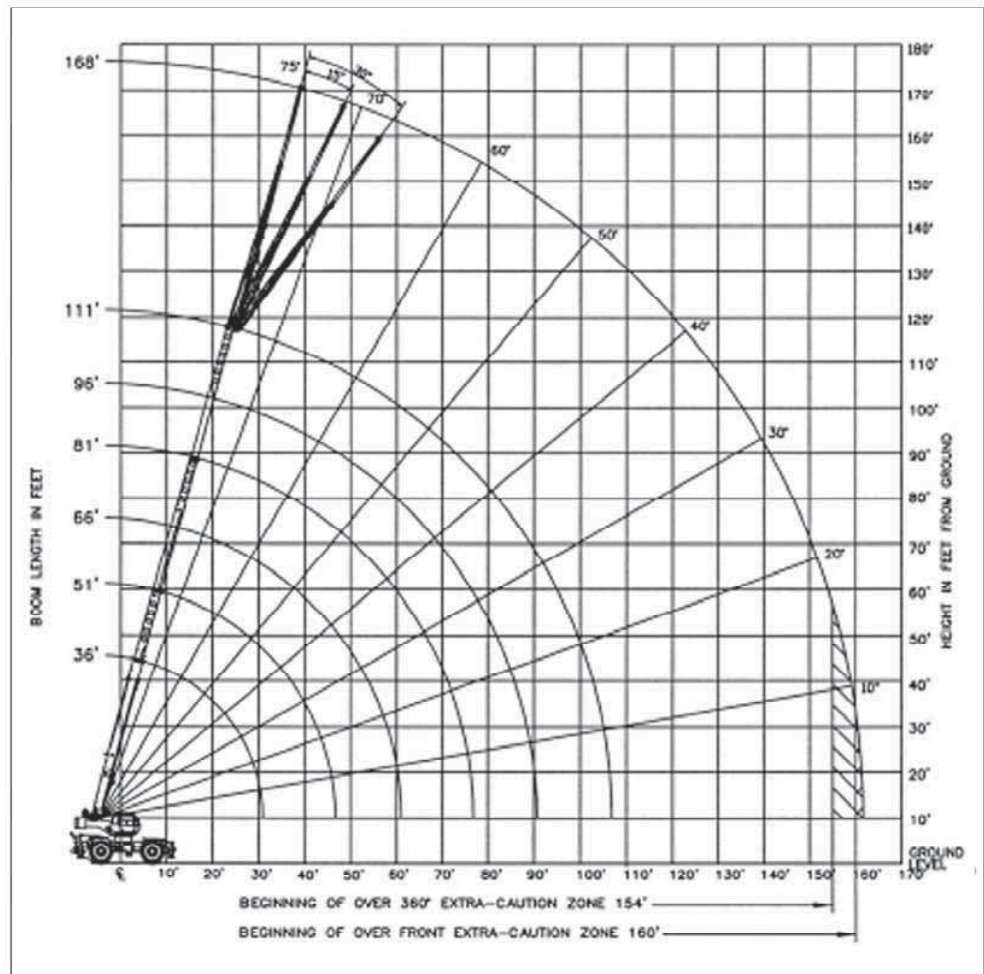

### CRANE WORKING CONDITIONS

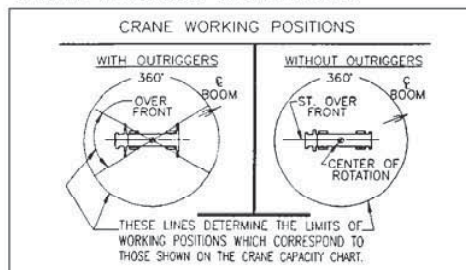

### REDUCTION IN MAIN BOOM CAPACITY

|                             |                |
|-----------------------------|----------------|
| All Jibs in Stowed Position | _____ 0 Lbs.   |
| Aux. Boom in Head Sheave    | _____ 100 Lbs. |

### HOOK BLOCK WEIGHTS

|                       |                 |
|-----------------------|-----------------|
| Hook & Ball           | _____ 419 Lbs.  |
| Hook Block (5 Sheave) | _____ 1608 Lbs. |

# Lifting Capacities – Pounds (36’ – 111’ boom)

MODEL RT665


COUNTERWEIGHT:  
W/AUX. WINCH 13,100 LBS.  
W/O AUX. WINCH 14,200 LBS.  
BOOM LENGTH 36-111 FT.  
OUTRIGGER SPREAD 24 FT.

STABILITY PCT.  
ON OUTRIGGERS 85%  
ON TIRES 75%  
PCSA CLASS 10-270

**CAUTION:** Do not use this specification sheet as a load rating chart. The format of data is not consistent with the machine chart and may be subject to change.

## ON OUTRIGGERS - FULLY EXTENDED

| LOAD RADIUS (FT) | BOOM LENGTH 36 FT     |                 |           | BOOM LENGTH 51 FT     |                 |           | BOOM LENGTH 66 FT     |                 |           | LOAD RADIUS (FT) |
|------------------|-----------------------|-----------------|-----------|-----------------------|-----------------|-----------|-----------------------|-----------------|-----------|------------------|
|                  | BOOM ANGLE (DEG) REF. | OVER FRONT (LB) | 360° (LB) | BOOM ANGLE (DEG) REF. | OVER FRONT (LB) | 360° (LB) | BOOM ANGLE (DEG) REF. | OVER FRONT (LB) | 360° (LB) |                  |
| 10               | 67.1                  | 130,000*        | 130,000*  | 74.1                  | 80,100*         | 80,100*   |                       |                 |           | 10               |
| 12               | 63.6                  | 106,800*        | 106,800*  | 71.8                  | 80,100*         | 80,100*   |                       |                 |           | 12               |
| 15               | 57.5                  | 86,100*         | 85,900*   | 68.1                  | 78,500*         | 78,500*   | 73.3                  | 62,000*         | 62,000*   | 15               |
| 20               | 48.0                  | 62,100*         | 62,100*   | 61.9                  | 63,400*         | 63,400*   | 68.7                  | 54,900*         | 54,900*   | 20               |
| 25               | 35.9                  | 47,700*         | 47,700*   | 55.3                  | 48,900*         | 48,900*   | 63.9                  | 49,200*         | 49,200*   | 25               |
| 30               | 18.0                  | 37,800*         | 37,800*   | 48.0                  | 39,200*         | 39,200*   | 58.9                  | 39,900*         | 39,900*   | 30               |
| 35               | **                    |                 |           | 39.9                  | 32,300*         | 32,300*   | 53.7                  | 33,000*         | 33,000*   | 35               |
| 40               |                       |                 |           | 29.9                  | 27,100*         | 27,000*   | 48.0                  | 27,700*         | 27,500*   | 40               |
| 45               |                       |                 |           | 15.0                  | 22,200*         | 21,400*   | 41.9                  | 23,000*         | 2,200*    | 45               |
| 50               |                       |                 |           | **                    |                 |           | 34.8                  | 19,100*         | 18,300*   | 50               |
| 55               |                       |                 |           |                       |                 |           | 26.2                  | 16,000*         | 15,200*   | 55               |
| 60               |                       |                 |           |                       |                 |           | 13.2                  | 13,500*         | 12,700*   | 60               |
| 65               |                       |                 |           |                       |                 |           | **                    |                 |           | 65               |
| 70               |                       |                 |           |                       |                 |           |                       |                 |           | 70               |
| 75               |                       |                 |           |                       |                 |           |                       |                 |           | 75               |
| 80               |                       |                 |           |                       |                 |           |                       |                 |           | 80               |
| 85               |                       |                 |           |                       |                 |           |                       |                 |           | 85               |
| 90               |                       |                 |           |                       |                 |           |                       |                 |           | 90               |
| 95               |                       |                 |           |                       |                 |           |                       |                 |           | 95               |
| 100              |                       |                 |           |                       |                 |           |                       |                 |           | 100              |
| 105              |                       |                 |           |                       |                 |           |                       |                 |           | 105              |
| 110              |                       |                 |           |                       |                 |           |                       |                 |           | 110              |



**USE THESE CHARTS ONLY  
WHEN ALL OUTRIGGERS  
ARE FULLY EXTENDED**

## ON OUTRIGGERS - FULLY EXTENDED

| LOAD RADIUS (FT) | BOOM LENGTH 81 FT     |                 |           | BOOM LENGTH 96 FT     |                 |           | BOOM LENGTH 111 FT    |                 |           | LOAD RADIUS (FT) |
|------------------|-----------------------|-----------------|-----------|-----------------------|-----------------|-----------|-----------------------|-----------------|-----------|------------------|
|                  | BOOM ANGLE (DEG) REF. | OVER FRONT (LB) | 360° (LB) | BOOM ANGLE (DEG) REF. | OVER FRONT (LB) | 360° (LB) | BOOM ANGLE (DEG) REF. | OVER FRONT (LB) | 360° (LB) |                  |
| 10               |                       |                 |           |                       |                 |           |                       |                 |           | 10               |
| 12               |                       |                 |           |                       |                 |           |                       |                 |           | 12               |
| 15               |                       |                 |           |                       |                 |           |                       |                 |           | 15               |
| 20               | 72.8                  | 46,300*         | 46,300*   |                       |                 |           |                       |                 |           | 20               |
| 25               | 69.0                  | 40,800*         | 40,800*   | 72.4                  | 35,400*         | 35,400*   |                       |                 |           | 25               |
| 30               | 65.2                  | 36,100*         | 36,100*   | 69.3                  | 31,300*         | 31,300*   | 72.2                  | 27,600*         | 27,600*   | 30               |
| 35               | 61.2                  | 32,400*         | 32,400*   | 66.0                  | 28,100*         | 28,100*   | 69.4                  | 24,900*         | 24,900*   | 35               |
| 40               | 57.1                  | 28,100*         | 27,900*   | 62.7                  | 25,400*         | 25,400*   | 66.7                  | 22,600*         | 22,600*   | 40               |
| 45               | 52.7                  | 23,300*         | 22,500*   | 59.3                  | 23,200*         | 22,700*   | 63.8                  | 20,700*         | 20,700*   | 45               |
| 50               | 48.1                  | 19,400*         | 18,600*   | 55.5                  | 19,600*         | 18,800*   | 60.9                  | 18,900*         | 18,900*   | 50               |
| 55               | 43.1                  | 16,400*         | 15,600*   | 52.0                  | 16,600*         | 15,800*   | 57.9                  | 16,700*         | 15,900*   | 55               |
| 60               | 37.6                  | 14,000*         | 13,200*   | 48.1                  | 14,200*         | 13,400*   | 54.7                  | 14,300*         | 13,500*   | 60               |
| 65               | 31.3                  | 12,000*         | 11,300*   | 43.9                  | 12,300*         | 11,500*   | 51.5                  | 12,400*         | 11,600*   | 65               |
| 70               | 23.6                  | 10,300*         | 9,600*    | 39.4                  | 10,600*         | 9,900*    | 48.1                  | 10,800*         | 10,000*   | 70               |
| 75               | 11.9                  | 8,900*          | 8,200*    | 34.4                  | 9,300*          | 8,500*    | 44.5                  | 9,400*          | 8,700*    | 75               |
| 80               | **                    |                 |           | 28.7                  | 8,100*          | 7,400*    | 40.7                  | 8,200*          | 7,500*    | 80               |
| 85               |                       |                 |           | 21.7                  | 7,000*          | 6,300*    | 36.6                  | 7,200*          | 6,500*    | 85               |
| 90               |                       |                 |           | 11.0                  | 6,000*          | 5,400*    | 31.9                  | 6,300*          | 5,700*    | 90               |
| 95               |                       |                 |           | **                    |                 |           | 26.7                  | 5,500*          | 4,900*    | 95               |
| 100              |                       |                 |           |                       |                 |           | 20.1                  | 4,800*          | 4,200*    | 100              |
| 105              |                       |                 |           |                       |                 |           | 10.2                  | 4,100*          | 3,600*    | 105              |
| 110              |                       |                 |           |                       |                 |           | **                    |                 |           | 110              |

### \*\* MAXIMUM CAPACITY AT 0 DEGREE BOOM ANGLE

| BOOM LENGTH 36 FT |                 |           | BOOM LENGTH 51 FT |                 |           | BOOM LENGTH 66 FT |                 |           | BOOM LENGTH 81 FT |                 |           | BOOM LENGTH 96 FT |                 |           | BOOM LENGTH 111 FT |                 |           |
|-------------------|-----------------|-----------|-------------------|-----------------|-----------|-------------------|-----------------|-----------|-------------------|-----------------|-----------|-------------------|-----------------|-----------|--------------------|-----------------|-----------|
| LOAD RADIUS (FT)  | OVER FRONT (LB) | 360° (LB) | LOAD RADIUS (FT)  | OVER FRONT (LB) | 360° (LB) | LOAD RADIUS (FT)  | OVER FRONT (LB) | 360° (LB) | LOAD RADIUS (FT)  | OVER FRONT (LB) | 360° (LB) | LOAD RADIUS (FT)  | OVER FRONT (LB) | 360° (LB) | LOAD RADIUS (FT)   | OVER FRONT (LB) | 360° (LB) |
| 31.7              | 20,400*         | 20,400*   | 46.7              | 12,400*         | 12,400*   | 61.7              | 8,000*          | 8,000*    | 76.7              | 5,300*          | 5,300*    | 91.7              | 3,400*          | 3,400*    | 106.7              | 2,100*          | 2,100*    |

# Lifting Capacities – Pounds (36’ – 111’ boom)

MODEL RT665

COUNTERWEIGHT:  
W/AUX. WINCH 13,100 LBS.  
W/O AUX. WINCH 14,200 LBS.  
BOOM LENGTH 36-111 FT.  
OUTRIGGER SPREAD 24 FT.

STABILITY PCT.  
ON OUTRIGGERS 85%  
ON TIRES 75%  
PCSA CLASS 10-270


**CAUTION:** Do not use this specification sheet as a load rating chart. The format of data is not consistent with the machine chart and may be subject to change.

## ON OUTRIGGERS - MID POSITION

| LOAD RADIUS (FT) | BOOM LENGTH 36 FT     |           | BOOM LENGTH 51 FT     |           | BOOM LENGTH 66 FT     |           | BOOM LENGTH 81 FT     |           | BOOM LENGTH 96 FT     |           | BOOM LENGTH 111 FT    |           | LOAD RADIUS (FT) |
|------------------|-----------------------|-----------|-----------------------|-----------|-----------------------|-----------|-----------------------|-----------|-----------------------|-----------|-----------------------|-----------|------------------|
|                  | BOOM ANGLE (DEG) REF. | 360° (LB) | BOOM ANGLE (DEG) REF. | 360° (LB) | BOOM ANGLE (DEG) REF. | 360° (LB) | BOOM ANGLE (DEG) REF. | 360° (LB) | BOOM ANGLE (DEG) REF. | 360° (LB) | BOOM ANGLE (DEG) REF. | 360° (LB) |                  |
| 10               | 67.1                  | 121,200*  | 74.1                  | 80,100*   |                       |           |                       |           |                       |           |                       |           | 10               |
| 12               | 63.6                  | 106,800*  | 71.8                  | 80,100*   |                       |           |                       |           |                       |           |                       |           | 12               |
| 15               | 57.5                  | 86,000*   | 68.1                  | 78,500*   | 73.3                  | 62,000*   |                       |           |                       |           |                       |           | 15               |
| 20               | 48.0                  | 48,800    | 61.9                  | 49,900    | 68.7                  | 50,400    | 72.8                  | 46,300*   |                       |           |                       |           | 20               |
| 25               | 35.9                  | 31,300    | 55.3                  | 32,700    | 63.9                  | 33,200    | 69.0                  | 33,500    | 72.4                  | 33,700    |                       |           | 25               |
| 30               | 18.0                  | 21,800    | 48.0                  | 23,400    | 58.9                  | 23,900    | 65.2                  | 24,200    | 69.3                  | 24,400    | 72.2                  | 24,500    | 30               |
| 35               | **                    |           | 39.9                  | 17,500    | 53.7                  | 18,100    | 61.2                  | 18,300    | 66.0                  | 18,500    | 69.4                  | 18,600    | 35               |
| 40               |                       |           | 29.9                  | 13,300    | 48.0                  | 14,100    | 57.1                  | 14,300    | 62.7                  | 14,500    | 66.7                  | 14,600    | 40               |
| 45               |                       |           | 15.0                  | 10,300    | 41.9                  | 11,100    | 52.7                  | 11,400    | 59.3                  | 11,600    | 63.8                  | 11,700    | 45               |
| 50               |                       |           | **                    |           | 34.8                  | 8,800     | 48.1                  | 9,200     | 55.5                  | 9,400     | 60.9                  | 9,500     | 50               |
| 55               |                       |           |                       |           | 26.2                  | 7,000     | 43.1                  | 7,400     | 52.0                  | 7,600     | 57.9                  | 7,800     | 55               |
| 60               |                       |           |                       |           | 13.2                  | 5,400     | 37.6                  | 5,900     | 48.1                  | 6,200     | 54.7                  | 6,300     | 60               |
| 65               |                       |           |                       |           | **                    |           | 31.3                  | 4,700     | 43.9                  | 5,000     | 51.5                  | 5,200     | 65               |
| 70               |                       |           |                       |           |                       |           | 23.6                  | 3,700     | 39.4                  | 4,000     | 48.1                  | 4,200     | 70               |
| 75               |                       |           |                       |           |                       |           | 11.9                  | 2,800     | 34.4                  | 3,100     | 44.5                  | 3,300     | 75               |
| 80               |                       |           |                       |           |                       |           | **                    |           | 28.7                  | 2,400     | 40.7                  | 2,600     | 80               |

## \*\* MAXIMUM CAPACITY AT 0 DEGREE BOOM ANGLE

| LOAD RADIUS (FT) | BOOM LENGTH 36 FT |                  | BOOM LENGTH 51 FT |                  | BOOM LENGTH 66 FT |                  | BOOM LENGTH 81 FT |                  | BOOM LENGTH 96 FT |                  | BOOM LENGTH 111 FT |  |
|------------------|-------------------|------------------|-------------------|------------------|-------------------|------------------|-------------------|------------------|-------------------|------------------|--------------------|--|
|                  | 360° (LB)         | LOAD RADIUS (FT) | 360° (LB)         | LOAD RADIUS (FT) | 360° (LB)         | LOAD RADIUS (FT) | 360° (LB)         | LOAD RADIUS (FT) | 360° (LB)         | LOAD RADIUS (FT) | 360° (LB)          |  |
| 31.7             | 19,200            | 46.7             | 9,300             | 61.7             | 4,900             | 76.7             | 2,500             |                  |                   |                  |                    |  |



**USE THESE CHARTS ONLY  
WHEN ALL OUTRIGGERS ARE  
PINNED IN MID POSITION**

# Lifting Capacities – Pounds (36’ – 111’ boom)

MODEL RT665

COUNTERWEIGHT:  
W/AUX. WINCH 13,100 LBS.  
W/O AUX. WINCH 14,200 LBS.  
BOOM LENGTH 36-111 FT.  
OUTRIGGER SPREAD 24 FT.

STABILITY PCT.  
ON OUTRIGGERS 85%  
ON TIRES 75%  
PCSA CLASS 10-270


**CAUTION:** Do not use this specification sheet as a load rating chart. The format of data is not consistent with the machine chart and may be subject to change.

## ON OUTRIGGERS - RETRACTED

| LOAD RADIUS (FT) | BOOM LENGTH 36 FT     |           | BOOM LENGTH 51 FT     |           | BOOM LENGTH 66 FT     |           | BOOM LENGTH 81 FT     |           | BOOM LENGTH 96 FT     |           | BOOM LENGTH 111 FT    |           | LOAD RADIUS (FT) |
|------------------|-----------------------|-----------|-----------------------|-----------|-----------------------|-----------|-----------------------|-----------|-----------------------|-----------|-----------------------|-----------|------------------|
|                  | BOOM ANGLE (DEG) REF. | 360° (LB) | BOOM ANGLE (DEG) REF. | 360° (LB) | BOOM ANGLE (DEG) REF. | 360° (LB) | BOOM ANGLE (DEG) REF. | 360° (LB) | BOOM ANGLE (DEG) REF. | 360° (LB) | BOOM ANGLE (DEG) REF. | 360° (LB) |                  |
| 10               | 67.1                  | 73,700    | 74.1                  | 74,900    |                       |           |                       |           |                       |           |                       |           | 10               |
| 12               | 63.6                  | 51,700    | 71.8                  | 51,700    |                       |           |                       |           |                       |           |                       |           | 12               |
| 15               | 57.5                  | 34,300    | 68.1                  | 35,300    | 73.3                  | 35,800    |                       |           |                       |           |                       |           | 15               |
| 20               | 48.0                  | 20,100    | 61.9                  | 21,400    | 68.7                  | 21,800    | 72.8                  | 22,100    |                       |           |                       |           | 20               |
| 25               | 35.9                  | 12,800    | 55.3                  | 14,100    | 63.9                  | 14,600    | 69.0                  | 14,900    | 72.4                  | 15,000    |                       |           | 25               |
| 30               | 18.0                  | 8,200     | 48.0                  | 9,600     | 58.9                  | 10,200    | 65.2                  | 10,500    | 69.3                  | 10,700    | 72.2                  | 10,800    | 30               |
| 35               | **                    |           | 39.9                  | 6,600     | 53.7                  | 7,200     | 61.2                  | 7,600     | 66.0                  | 7,700     | 69.4                  | 7,800     | 35               |
| 40               |                       |           | 29.9                  | 4,400     | 48.0                  | 5,000     | 57.1                  | 5,400     | 62.7                  | 5,600     | 66.7                  | 5,700     | 40               |
| 45               |                       |           | 15.0                  | 2,600     | 41.9                  | 3,400     | 52.7                  | 3,800     | 59.3                  | 4,000     | 63.8                  | 4,100     | 45               |
| 50               |                       |           |                       |           |                       |           | 48.1                  | 2,500     | 55.5                  | 2,700     | 60.9                  | 2,900     | 50               |
| 55               |                       |           |                       |           |                       |           |                       |           |                       |           |                       |           | 55               |

## \*\* MAXIMUM CAPACITY AT 0 DEGREE BOOM ANGLE

| BOOM LENGTH 36 FT |           | BOOM LENGTH 51 FT |           | BOOM LENGTH 66 FT |           | BOOM LENGTH 81 FT |           | BOOM LENGTH 96 FT |           | BOOM LENGTH 111 FT |           |
|-------------------|-----------|-------------------|-----------|-------------------|-----------|-------------------|-----------|-------------------|-----------|--------------------|-----------|
| LOAD RADIUS (FT)  | 360° (LB) | LOAD RADIUS (FT)  | 360° (LB) | LOAD RADIUS (FT)  | 360° (LB) | LOAD RADIUS (FT)  | 360° (LB) | LOAD RADIUS (FT)  | 360° (LB) | LOAD RADIUS (FT)   | 360° (LB) |
| 31.7              | 6,800     |                   |           |                   |           |                   |           |                   |           |                    |           |



**USE THESE CHARTS WHEN ALL OUTRIGGER BEAMS ARE NOT IN EITHER THE MID OR FULLY EXTENDED POSITION**

# Lifting Capacities – Pounds (36’ – 111’ boom)

MODEL RT665

COUNTERWEIGHT:  
W/AUX. WINCH 13,100 LBS.  
W/O AUX. WINCH 14,200 LBS.  
BOOM LENGTH 36-111 FT.  
OUTRIGGER SPREAD 24 FT.

STABILITY PCT.  
ON OUTRIGGERS 85%  
ON TIRES 75%  
PCSA CLASS 10-270

**CAUTION:** Do not use this specification sheet as a load rating chart. The format of data is not consistent with the machine chart and may be subject to change.

## SIDE STOW JIB ON FULLY EXTENDED OUTRIGGERS

| LOADED BOOM ANGLE (DEG) | 32 FT OFFSETABLE JIB/NO PULL OUT INSTALLED |                 |           |                        |                 |           |                        |                 |           | 33 FT OFFSETABLE JIB/PULL OUT RETRACTED |                 |           |                        |                 |           |                        |                 |           | LOADED BOOM ANGLE (DEG) |
|-------------------------|--|-----------------|-----------|------------------------|-----------------|-----------|------------------------|-----------------|-----------|---|-----------------|-----------|------------------------|-----------------|-----------|------------------------|-----------------|-----------|-------------------------|
|                         | 0° OFFSET                                  |                 |           | 15° OFFSET             |                 |           | 30° OFFSET             |                 |           | 0° OFFSET                               |                 |           | 15° OFFSET             |                 |           | 30° OFFSET             |                 |           |                         |
|                         | (REF) LOAD RADIUS (FT)                     | FRONT ONLY (LB) | 360° (LB) | (REF) LOAD RADIUS (FT) | FRONT ONLY (LB) | 360° (LB) | (REF) LOAD RADIUS (FT) | FRONT ONLY (LB) | 360° (LB) | (REF) LOAD RADIUS (FT)                  | FRONT ONLY (LB) | 360° (LB) | (REF) LOAD RADIUS (FT) | FRONT ONLY (LB) | 360° (LB) | (REF) LOAD RADIUS (FT) | FRONT ONLY (LB) | 360° (LB) |                         |
| 75                      | 40   | 12,600*         | 12,600*   | 48                     | 8,500*          | 8,500*    | 54                     | 6,600*          | 6,600*    | 41                                      | 12,600*         | 12,600*   | 49                     | 8,500*          | 8,500*    | 55                     | 6,600*          | 6,600*    | 75                      |
| 73                      | 46   | 11,900*         | 11,900*   | 53                     | 8,200*          | 8,200*    | 59                     | 6,400*          | 6,400*    | 47                                      | 11,900*         | 11,900*   | 54                     | 8,200*          | 8,200*    | 60                     | 6,400*          | 6,400*    | 73                      |
| 71                      | 51   | 11,300*         | 11,300*   | 58                     | 7,800*          | 7,800*    | 63                     | 6,300*          | 6,300*    | 52                                      | 11,300*         | 11,300*   | 59                     | 7,800*          | 7,800*    | 64                     | 6,300*          | 6,300*    | 71                      |
| 68                      | 58   | 10,400*         | 10,400*   | 65                     | 7,400*          | 7,400*    | 70                     | 6,000*          | 6,000*    | 59                                      | 10,400*         | 10,400*   | 66                     | 7,400*          | 7,400*    | 71                     | 6,000*          | 6,000*    | 68                      |
| 65                      | 65   | 9,600*          | 9,600*    | 71                     | 7,100*          | 7,100*    | 76                     | 5,900*          | 5,900*    | 66                                      | 9,600*          | 9,600*    | 72                     | 7,100*          | 7,100*    | 77                     | 5,900*          | 5,900*    | 65                      |
| 62                      | 71   | 8,900*          | 8,900*    | 78                     | 6,800*          | 6,800*    | 83                     | 5,700*          | 5,700*    | 72                                      | 8,900*          | 8,900*    | 79                     | 6,800*          | 6,800*    | 84                     | 5,700*          | 5,700*    | 62                      |
| 59                      | 78   | 8,300*          | 8,300*    | 84                     | 6,500*          | 6,500*    | 88                     | 5,500*          | 5,500*    | 79                                      | 8,300*          | 8,200*    | 85                     | 6,500*          | 6,500*    | 89                     | 5,500*          | 5,500*    | 59                      |
| 55                      | 86   | 7,700*          | 7,700*    | 91                     | 6,200*          | 6,200*    | 95                     | 5,300*          | 5,300*    | 87                                      | 7,600*          | 6,800*    | 92                     | 6,200*          | 6,200*    | 96                     | 5,300*          | 5,300*    | 55                      |
| 51                      | 93   | 7,100*          | 6,500*    | 98                     | 5,900*          | 5,900*    | 102                    | 5,200*          | 5,200*    | 94                                      | 6,300*          | 5,700*    | 99                     | 5,600*          | 5,200*    | 103                    | 5,200*          | 5,000*    | 51                      |
| 47                      | 100  | 6,000*          | 5,500*    | 105                    | 5,500*          | 5,100*    | 108                    | 5,000*          | 5,000*    | 101                                     | 5,300*          | 4,700*    | 106                    | 4,800*          | 4,400*    | 109                    | 4,700*          | 4,200*    | 47                      |
| 43                      | 106  | 5,200*          | 4,600*    | 111                    | 4,800*          | 4,400*    | 113                    | 4,700*          | 4,300*    | 107                                     | 4,400*          | 3,900*    | 112                    | 4,100*          | 3,600*    | 114                    | 4,000*          | 3,600*    | 43                      |
| 38                      | 113  | 4,300*          | 3,800*    | 119                    | 4,100*          | 3,600*    | 119                    | 4,000*          | 3,600*    | 114                                     | 3,600*          | 3,100*    | 120                    | 3,400*          | 2,900*    | 120                    | 3,300*          | 2,900*    | 38                      |
| 32                      | 121  | 3,500*          | 3,100*    | 124                    | 3,400*          | 2,900*    | 125                    | 3,300*          | 2,900*    | 122                                     | 2,800*          | 2,300*    | 125                    | 2,700*          | 2,200*    | 126                    | 2,600*          | 2,200*    | 32                      |
| 25                      | 127  | 2,900*          | 2,500*    | 130                    | 2,800*          | 2,300*    |                        |                 |           | 129                                     | 2,200*          | 1,800*    | 132                    | 2,100*          | 1,700*    |                        |                 |           | 25                      |
| 17                      | 133  | 2,400*          | 2,000*    | 135                    | 2,300*          | 1,900*    |                        |                 |           | 135                                     | 1,700*          | 1,300*    | 137                    | 1,700*          | 1,300*    |                        |                 |           | 17                      |

## SIDE STOW JIB ON FULLY EXTENDED OUTRIGGERS

| LOADED BOOM ANGLE (DEG) | 57 FT OFFSETABLE JIB   |                 |           |                        |                 |           |                        |                 |           | LOADED BOOM ANGLE (DEG) |
|-------------------------|------------------------|-----------------|-----------|------------------------|-----------------|-----------|------------------------|-----------------|-----------|-------------------------|
|                         | 0° OFFSET              |                 |           | 15° OFFSET             |                 |           | 30° OFFSET             |                 |           |                         |
|                         | (REF) LOAD RADIUS (FT) | FRONT ONLY (LB) | 360° (LB) | (REF) LOAD RADIUS (FT) | FRONT ONLY (LB) | 360° (LB) | (REF) LOAD RADIUS (FT) | FRONT ONLY (LB) | 360° (LB) |                         |
| 75                      | 52                     | 6,600*          | 6,600*    | 64                     | 4,600*          | 4,600*    | 74                     | 3,400*          | 3,400*    | 75                      |
| 73                      | 58                     | 6,200*          | 6,200*    | 70                     | 4,400*          | 4,400*    | 80                     | 3,300*          | 3,300*    | 73                      |
| 71                      | 64                     | 5,900*          | 5,900*    | 76                     | 4,200*          | 4,200*    | 85                     | 3,200*          | 3,200*    | 71                      |
| 68                      | 73                     | 5,600*          | 5,600*    | 83                     | 3,900*          | 3,900*    | 92                     | 3,100*          | 3,100*    | 68                      |
| 65                      | 81                     | 5,200*          | 5,200*    | 91                     | 3,700*          | 3,700*    | 99                     | 3,000*          | 3,000*    | 65                      |
| 62                      | 89                     | 4,800*          | 4,800*    | 98                     | 3,500*          | 3,500*    | 106                    | 2,900*          | 2,900*    | 62                      |
| 59                      | 96                     | 4,500*          | 4,500*    | 105                    | 3,400*          | 3,400*    | 112                    | 2,800*          | 2,800*    | 59                      |
| 55                      | 105                    | 4,100*          | 4,100*    | 113                    | 3,200*          | 3,200*    | 119                    | 2,700*          | 2,700*    | 55                      |
| 51                      | 114                    | 3,800*          | 3,800*    | 121                    | 3,000*          | 3,000*    | 126                    | 2,700*          | 2,700*    | 51                      |
| 47                      | 122                    | 3,500*          | 3,500*    | 128                    | 2,900*          | 2,900*    | 132                    | 2,600*          | 2,600*    | 47                      |
| 43                      | 129                    | 3,300*          | 3,000*    | 135                    | 2,800*          | 2,800*    | 138                    | 2,600*          | 2,600*    | 43                      |
| 38                      | 137                    | 2,700*          | 2,400*    | 142                    | 2,600*          | 2,200*    | 144                    | 2,500*          | 2,200*    | 38                      |
| 32                      | 145                    | 2,200*          | 1,800*    | 149                    | 2,100*          | 1,700*    | 149                    | 2,000*          | 1,700*    | 32                      |
| 25                      | 153                    | 1,600*          | 1,300*    | 155                    | 1,600*          | 1,200*    |                        |                 |           | 25                      |
| 17                      | 159                    | 1,200*          | 1,000*    | 160                    | 1,200*          | 900*      |                        |                 |           | 17                      |

### NOTES FOR JIB CAPACITIES

- A. For all boom lengths less than the maximum with a jib erected, the rated loads are determined by boom angle only in the appropriate column.
- B. For boom angle not shown, use the capacity of the next lower boom angle.
- C. Listed radii are for extended main boom only.

### ON TIRES

| RADIUS (FT) | MAX BOOM LENGTH (FT) | 29.5 X 25 28PR |         |              |         |
|-------------|----------------------|----------------|---------|--------------|---------|
|             |                      | STATIONARY     |         | PICK & CARRY |         |
|             |                      | STATIC         | 360°    | CREEP        | 2.5 MPH |
| 10          | 36                   | 55,700         | 87,600* | 68,800       | 51,900  |
| 12          | 36                   | 42,800         | 77,300* | 60,500       | 45,400  |
| 15          | 36                   | 29,500         | 61,400  | 50,800       | 37,700  |
| 20          | 36                   | 17,600         | 37,300  | 37,300       | 28,800  |
| 25          | 51                   | 11,800         | 22,600  | 22,600       | 22,600  |
| 30          | 51                   | 8,000          | 15,700  | 15,700       | 15,700  |
| 35          | 51                   | 5,700          | 12,700  | 12,700       | 12,700  |
| 40          | 51                   | 4,100          | 10,200  | 10,200       | 10,200  |
| 45          | 66                   | 2,900          | 8,100   | 8,100        | 8,100   |
| 50          | 66                   | 1,900          | 6,500   | 6,500        | 6,500   |
| 55          | 66                   |                | 5,200   | 5,200        | 5,200   |
| 60          | 81                   |                | 4,200   | 4,200        | 4,200   |
| 65          | 81                   |                | 3,400   | 3,400        | 3,400   |
| 75          | 81                   |                | 2,700   | 2,700        | 2,700   |

### NOTES FOR ON TIRE CAPACITIES

- A. For Pick and Carry operations, boom must be centered over the front of the crane with swing brake and lock engaged. Use minimum boom point height and keep load close to ground surface.
- B. The load should be restrained from swinging. NO ON TIRE OPERATION WITH JIB ERRECTED.
- C. Without outriggers, never maneuver the boom beyond listed load radii for applicable tires to ensure stability.
- D. Creep speed is crane movement of less than 200 Ft. (61m) in a 30 minute period and not exceeding 1.0 mph (1.6 km/h).
- E. Refer to General Notes for additional information.

### MAXIMUM PERMISSIBLE HOIST LINE LOAD

| LINE PARTS  | 1      | 2      | 3      | 4      | 5      | 6      | 7      | 8       | 9       | 10      |
|---|--------|--------|--------|--------|--------|--------|--------|---------|---------|---------|
| MAIN & AUX. HOIST   | 13,800 | 27,600 | 41,400 | 55,200 | 69,000 | 82,800 | 96,600 | 100,400 | 124,200 | 130,000 |
| WIRE ROPE: 3/4" ROTATION RESISTANT 34 x 7 COMPACTED STRAND, GRADE 2160, MINIMUM BREAKING STRENGTH - 34.5 TONS.<br>3/4" 6 X 19 OR 6 X 37, IPS, IWRC, PREFORMED RIGHT REGULAR LAY<br>MINIMUM BREAKING STRENGTH - 25.6 TONS. WEIGHT 1.04 LBS/FT. |        |        |        |        |        |        |        |         |         |         |

### RECOMMENDED TIRE PRESSURE

| TIRE SIZE       | STATIONARY | CREEP  | 2 1/2 MPH | TRAVEL |
|-----------------|------------|--------|-----------|--------|
| 29.5 X 25-28 PR | 81 PSI     | 81 PSI | 65 PSI    | 55 PSI |

# GENERAL NOTES

## GENERAL

1. Rated loads as shown on Lift Charts pertain to this machine as originally manufactured and equipped. Modifications to the machine or use of optional equipment other than that specified can result in a reduction of capacity.
2. Construction equipment can be hazardous if improperly operated or maintained. Operation and maintenance of this machine shall be in compliance with the information in the Operator's, Parts and Safety Manuals supplied with this machine. If these manuals are missing, order replacements from the manufacturer through your distributor.
3. These warnings do not constitute all of the operating conditions for the crane. The operator and job site supervision must read the OPERATORS MANUAL, CIMA SAFETY MANUAL, APPLICABLE OSHA REGULATIONS, AND SOCIETY OF MECHANICAL ENGINEERS (ASME) SAFETY STANDARDS FOR CRANES.
4. This crane and its load ratings are in accordance with POWER CRANE & SHOVEL ASSOCIATION, STANDARD NO. 4, SAE CRANE LOAD STABILITY TEST CODE J765A, SAE METHOD OF TEST FOR CRANE STRUCTURE J1063 AND APPLICABLE SAFETY CODE FOR CRANES, DERRICKS AND HOISTS, ASME/ANSI B30.5.

## DEFINITIONS

1. **LOAD RADIUS** – The horizontal distance from the axis of rotation before loading to the center of the vertical hoist line or tackle with a load applied.
2. **LOADED BOOM ANGLE** – It is the angle between the boom base section and the horizontal, after lifting the rated load at the rated radius. The boom angle before loading should be greater to account for deflections. The loaded boom angle combined with boom length give only an approximation of the operating radius.
3. **WORKING AREA** – Areas measured in a circular arc about the center-line of rotation as shown in the diagram.
4. **FREELY SUSPENDED LOAD** – Load hanging free with no direct external force applied except by the hoist rope.
5. **SIDE LOAD** – Horizontal force applied to the lifted load either on the ground or in the air.
6. **NO LOAD STABILITY LIMIT** – The stability limit radius shown on the range diagrams is the radius beyond which it is not permitted to position the boom, when the boom angle is less than the minimum shown on the applicable load chart, because the machine can overturn without any load.
7. **BOOM SIDE OF CRANE** – The side of the crane over which the boom is positioned when in an OVER SIDE working position.

## SET-UP

1. Crane load ratings are based on the crane being leveled and standing on a firm, uniform supporting surface.
2. Crane load ratings on outriggers are based on all outrigger beams being fully extended or in the case of partial extension ratings mechanically pinned in the appropriate position, and the tires free of the supporting surface.
3. Crane load ratings on tires depend on appropriate inflation pressure and the tire conditions. Caution must be exercised when increasing air pressures in tires. Consult Operator's Manual for precautions.
4. Use of jibs, lattice-type boom extensions, or fourth section pullouts extended is not permitted for pick and carry operations.
5. Consult appropriate section of the Operator's and Service Manual for more exact description of hoist line reeving.
6. The use of more parts of line than required by the load may result in having insufficient rope to allow the hook block to reach the ground.
7. Properly maintained wire rope is essential for safe crane operation. Consult Operator's Manual for proper maintenance and inspection requirements.
8. When spin-resistant wire rope is used, the allowable rope loading shall be the breaking strength divided by five (5), unless otherwise specified by the wire rope manufacturer.
9. Do not elevate the boom above 60° unless the boom is positioned in-line with the crane's chassis or the outriggers are extended. Failure to observe this warning may result in loss of stability.

## OPERATION

1. **CRANE LOAD RATINGS MUST NOT BE EXCEEDED. DO NOT ATTEMPT TO TIP THE CRANE TO DETERMINE ALLOWABLE LOADS.**
2. When either radius or boom length, or both, are between listed values, the smaller of the two listed load ratings shall be used.
3. Do not operate at longer radii than those listed on the applicable load rating chart (cross hatched areas shown on range diagrams).
4. The boom angles shown on the Capacity Chart give an approximation of the operating radius for a specified boom length. The boom angle, before loading, should be greater to account for boom deflection. It may be necessary to retract the boom if maximum boom angle is insufficient to maintain rated radius.
5. Power telescoping boom sections must be extended equally.
6. Rated loads include the weight of hook block, slings, and auxiliary lifting devices. Their weights shall be subtracted from the listed rated load to obtain the net load that can be lifted.  
When lifting over the jib the weight of any hook block, slings, and auxiliary lifting devices at the boom head must be added to the load.  
When jibs are erected but unused add two (2) times the weight of any hook block, slings, and auxiliary lifting devices at the jib head to the load.
7. Rated loads do not exceed 85% on outriggers or 75% on tires, of the tipping load as determined by SAE Crane Stability Test Code J765a. Structural strength ratings in chart are indicated with an asterisk (\*).
8. Rated loads are based on freely suspended loads. No attempt shall be made to drag a load horizontally on the ground in any direction.
9. The user shall operate at reduced ratings to allow for adverse job conditions, such as: Soft or uneven ground, out of level conditions, high winds, side loads, pendulum action, jerking or sudden stopping of loads, hazardous conditions, experience of personnel, two machine lifts, traveling with loads, electric wires, etc., (side pull on boom or jib is hazardous). Derating of the cranes lifting capacity is required when wind speed exceeds 20 MPH. The center of the lifted load must never be allowed to move more than 3" feet off the center line of the base boom section due to the effects of wind, inertia, or any combination of the two.  
\*\*Use 2 feet off the center line of the base boom for a two section boom, 3 feet for a three section boom, or 4 feet for a four section boom.
10. The maximum load which can be telescoped is not definable, because of variations in loadings and crane maintenance, but it is permissible to attempt retraction and extension if load ratings are not exceeded.
11. Load ratings are dependent upon the crane being maintained according to manufacturer's specifications.
12. It is recommended that load handling devices, including hooks, and hook blocks, be kept away from boom head at all times.
13. **FOR TRUCK CRANES ONLY:** 360° capacities apply only to machines equipped with a front outrigger jack and all five (5) outrigger jacks properly set. If the front (5th) outrigger jack is not properly set, the work area is restricted to the over side and over rear areas as shown on the Crane Working Positions diagram. Use the 360° load ratings in the overside work areas.
14. Do not lift with outrigger beams positioned between the fully extended and intermediate (pinned) positions.
15. Truck Cranes not equipped with equalizing (bogie) beams between the rear axles may not be used for lifting "on tires". Truck Cranes equipped with equalizing beams and rear air suspension should "dump" the air before lifting "on tires".

## CLAMSHELL, MAGNET, AND CONCRETE BUCKET SERVICE

1. Maximum boom length for clamshell and magnet service is 50 feet.
2. Weight of clamshell or magnet, plus contents are not to exceed 6,000 pounds or 90% of rated lifting capacities, whichever is less. For concrete bucket operation, weight of bucket and load must not exceed 90% of rated lifting capacity.

WE RESERVE THE RIGHT TO AMEND THESE SPECIFICATIONS AT ANY TIME WITHOUT NOTICE. THE ONLY WARRANTY APPLICABLE IS OUR STANDARD WRITTEN WARRANTY APPLICABLE TO THE PARTICULAR PRODUCT AND SALE. WE MAKE NO OTHER WARRANTY, EXPRESSED OR IMPLIED.



Las Vegas • San Bernardino

**RENTALS / SALES / PARTS / SERVICE**

**1-800-598-3465**

LAS VEGAS  
2730 N. NELLIS BLVD.  
LAS VEGAS, NV 89115

SAN BERNARDINO  
1185 E. COOLEY AVENUE  
SAN BERNARDINO, CA 92408

**WWW.INQUIPCO.COM**



# TEREX

TEREX Cranes

106 12th Street S.E.

Waverly, IA 50677-9466 USA

TEL: +1 (319) 352-3920

FAX: +1 (319) 352-5727

EMAIL: inquire@terexwaverly.com

WEB: terex.com